

Product Specifications

Model	AS-W-25	AS-W-32	AS-W-40	AS-W-50	AS-W-80	AS-W-100	AS-W-150	AS-W-200
Nominal diameter	25A	32A	40A	50A	80A	100A	150A	200A
Power supply	Built-in lithium battery							
Measurable fluid	Natural gas, air							
Working pressure (Absolute pressure)	0 ~ 0.5MPa (AS-WW-□-500B[A/G]/3) 0 ~ 0.2MPa (AS-WW-□-200B[A/G]/3) 0 ~ 0.5MPa (AS-WW-□-0B[A/G]/3)			0 ~ 1.0MPa (AS-WW-□-1000B[A/G]/3) 0 ~ 0.5MPa (AS-WW-□-500B[A/G]/3) 0 ~ 0.2MPa (AS-WW-□-200B[A/G]/3) 0 ~ 1.0MPa (AS-WW-□-0B[A/G]/3)				
Flow rate measurement precision *1	±5%RS (m³/h)	±0.7 ~ 7	±1.3 ~ 13	±1.6 ~ 16	±3 ~ 30	±6 ~ 60	±10 ~ 100	±24 ~ 240
	±2%RS (m³/h)	±7 ~ 35	±13 ~ 65	±16 ~ 80	±30 ~ 150	±60 ~ 300	±100 ~ 500	±240 ~ 1200
Low flow cut off (start flow rate) *2	0.05 m/s or less							
Fluid temperature and humidity	-20 ~ +60°C, 90% RH or less							
Pressure loss	Zero (equivalent to straight tube part)							
Accumulated flow volume	Accumulated flow volume: 00000000.0 (9 digits/m³ or Nm³)				Accumulated flow volume: 000000000 (10 digits/m³ or Nm³)			
Instantaneous flow rate *3	(1) Maximum indication value: ±19999Nm³/h (converted flow rate) (2) Maximum indication value: ±19999Nm³/h (actual flow rate) (Two decimal places for a value less than 200, one decimal place for a value from 200 to less than 2000, integer only for a value of 2000 or more)							
Temperature *3	00.0°C (3 digits)							
Pressure *3	0000.0kPa (5 digits)							
Contact output	Open drain output: Unit pulse (forward current), pulse unit: 100,1000,10000 (L/P or NL/P)							
Electronic statement signal communication	RS485 MODBUS/RTU							
Connection method	Rc 1	Rc 1-1/4	ISO7005-1 (GB/T9119-2000 PN1.6MPa Flange) equivalent *4					
Installation position	Horizontal, vertical							
Installation	Indoor, outdoor (protection level IP 64 or equivalent)							
Case material	Aluminum alloy				Stainless alloy			
Gas contact part material	Aluminum alloy, engineering plastic				Stainless alloy, engineering plastic			
Weight	1.8kg	1.7kg	7.6kg	9.6kg	13.3kg	13.2kg	20.4kg	35.4kg

- *1. The flow rate measurement range is ±5% RS: Inclusive before "-" and not inclusive after "-"; and ±2% RS: Inclusive for both before and after "-".
 *2. When the flow rate is less than 0.25% of the maximum flow rate, the instantaneous flow rate is indicated as 0 m³/h. For the normal conversion type, the low flow cut off value is the normal conversion flow rate corresponding to 0.05 m/s.
 *3. Automatically switched in every 4 seconds.
 *4. This flowmeter guarantees the flow measurement accuracy with the pipes listed in the right table.
 (If you use pipes with the different pipe standard and size not listed in the table, the flowmeter may not satisfy the flow measurement accuracy. Consult us in advance if it is considered to use different pipes out of this range.)

Piping standard	G3459 JIS 10K	EN10208						
Nominal diameter (mm)	25	32	40	50	80	100	150	200
Outer diameter (mm)	34	42.7	48.3	57	88.9	108	159	219.1
Thickness (mm)	2.8	2.8	4	3.5	4.5	4	4.5	10

External dimensions

Unit : mm

Model	Nominal diameter	L	H	D
AS-W-25	25A	147	208	80
AS-W-32	32A	147	208	80

ISO7-1 Taper screw connection (IS B 0203, B521, GB/T7306.2-2000) equivalent

Model	Nominal diameter	L	H
AS-W-40	40A	200	233
AS-W-50	50A	220	247
AS-W-80	80A	250	279
AS-W-100	100A	250	313
AS-W-150	150A	300	370
AS-W-200	200A	350	428

ISO7005-1 (GB/T9119-2000 PN1.6MPa Flange) equivalent

Caution regarding to methane

Depending on concentration (%) of methane in natural gas (NG), for each nominal diameter, requirement of the working pressure condition is provided as described in the below table. (Do not use if the working pressure does not satisfy the conditions below. Also, do not use if there is a possibility that methane concentration may change greatly after installation so that the conditions below will not be satisfied.)

Methane Concentration(%)	Working pressure(absolute)		
	100A	150A	200A
Over 99%	300kPa or above	400kPa or above	600kPa or above
Over 98% to 99%	Atmospheric pressure or above	200kPa or above	300kPa or above
Over 96% to 98%	Atmospheric pressure or above	200kPa or above	200kPa or above
Over 94% to 96%	Atmospheric pressure or above	Atmospheric pressure or above	200kPa or above
94% or less	Atmospheric pressure or above	Atmospheric pressure or above	Atmospheric pressure or above

Conversion table for actual flow rate and standard flow rate (for absolute pressure 0.54 MPa at 30°C)

	AS-W-40(40A)	AS-W-50(50A)	AS-W-80(80A)	AS-W-100(100A)	AS-W-150(150A)	AS-W-200(200A)
Actual flow rate (m³/h)	80	150	300	500	1200	2000
Standard flow rate (Nm³/h)	382	716	1432	2386	5726	9543

Formula

$$\text{Standard flow rate (Nm}^3\text{/h)} = \frac{\text{Absolute temperature at 20}^\circ\text{C (273.15K+20K)}}{\text{Absolute temperature of working temperature (273.15K+t)}} \times \frac{\text{Absolute pressure of working pressure (P)}}{\text{Absolute pressure at 1 atm (0.10133 MPa)}} \times \text{Actual flow rate (m}^3\text{/h)}$$

Manufactured and Distributed by

Aichi tokei denki co., ltd.

URL : <https://www.aichitokei.net/>
 1-2-70 Chitose, Atsuta-ku, Nagoya, 456-8691, Japan

For inquires, please contact us.

Overseas Business Division TEL +81-(0)52-661-5150

To Our Customers

Please understand that product specifications may be changed without notice in order to improve performance. We are always happy to provide the latest catalogs and brochures, and respond to inquiries made to our offices.

1.3

201902-AS_W-005




Reliability, Creativity, Service

For Fuel Gas

Ultrasonic Flowmeter

AS-W

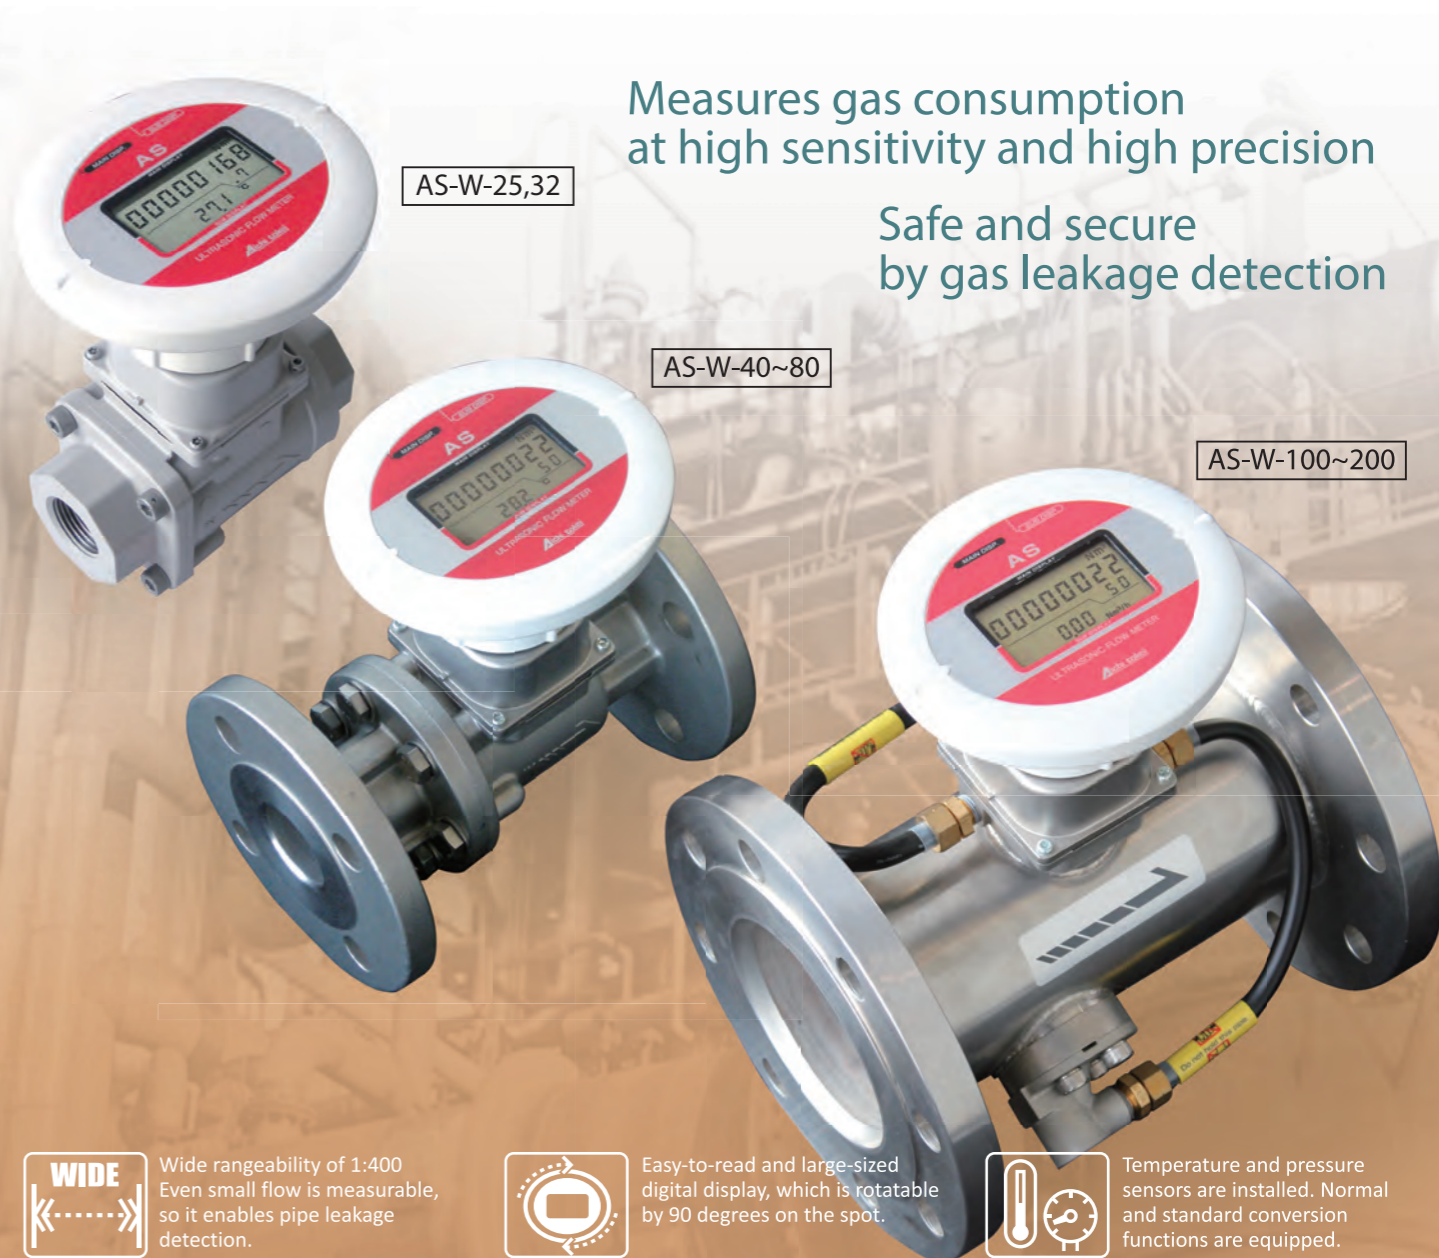

Measures gas consumption at high sensitivity and high precision

Safe and secure by gas leakage detection

AS-W-25,32

AS-W-40~80

AS-W-100~200



WIDE
Wide rangeability of 1:400
Even small flow is measurable, so it enables pipe leakage detection.



Easy-to-read and large-sized digital display, which is rotatable by 90 degrees on the spot.



Temperature and pressure sensors are installed. Normal and standard conversion functions are equipped.



Zero pressure loss and zero energy loss achieved by no obstacle inside the measurement tube.
No change of accuracy in long time use and free from maintenance.



2200 data logs
Enhanced logging function
Eleven data log items including timestamp, temperature, pressure, instantaneous flow rate, accumulated flow rate, etc. can be stored for up to 2200 sets. Data acquisition interval can be set to 5 minutes to 24 hours.



OUTPUT
Remote measurement
RS485 output in addition to unit pulses allows for remote indication and energy management.



LONGLIFE
Runs with a built-in lithium battery and no necessity of electric construction.



Examples of applications

EX:1 Flow control and leakage monitoring with RTU and GIS




EX:2 Adaptability under wide changes in flow volume

- No need to prepare meters separately for each production site and canteen.
- 1 piece of AS meter with wide rangeability allows for covering expansion of plant equipments.



EX:3 Space saving and work-efficiency-improvement

- Improvement in space and accuracy by replacing from a large-sized diaphragm gas meter at a hotel, a restaurant, a canteen, etc.
- Wide rangeability enables size down of pipes and equipments, and it contributes to construction cost reduction and work-efficiency improvement.

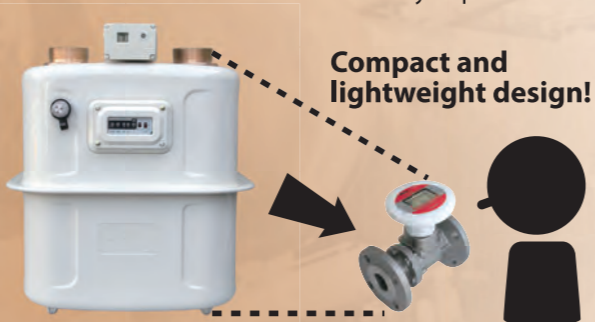


AS series solved these problems.

CASE1 | Customer A


Problem

At their middle supply pressure site, when natural gas was supplied, failure that impurities in the pipes damage the rotating parts of existing rotary meters and turbine meters often occurred.



After implementation


AS meter does not have any obstacle inside the measurement tube, so impurities contained in gas are blown away to downstream side of AS meter, and do not damage AS meter. Performance stability of AS meter under middle pressure supply was also proved.



CASE2 | Customer B


Problem

Because the factory used LPG gas until 2015, a lot of drains from LPG were remaining in the pipes. Rotary meters were affected by the drains.



After implementation

Correct measurement of AS meter is not affected by residue such as LPG drains in pipes. Operation status of all installed AS meters in the factory are in good condition.




CASE3 | Customer C

Problem


Gas consumption of the manufacturer, whose products are mainly for overseas markets, varies widely depends on quantities of orders from overseas, which changes very much due to economic trends.

After implementation

Wide flow-rate range of AS ultrasonic flow meters enabled accurate measurement both under small and large consumption.

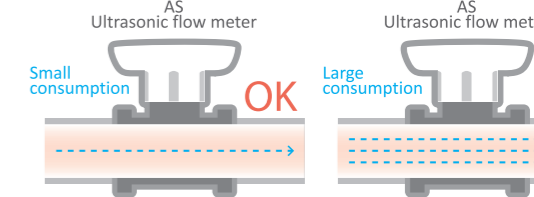


System configuration example

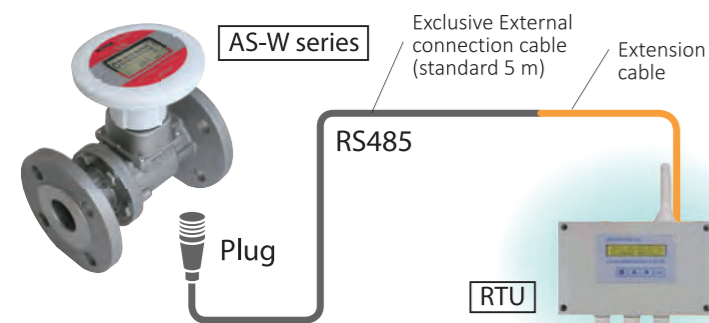


Installation method

Make sure to align the central axis of the meter with that of the piping. In order to minimize the deviation of the central axes of the flow meter and piping, please use the centering collars provided as an accessory. Not using the centering collars leads to be out of the warranty accuracy. Insert the centering collars into the holes of flange and gasket at the upper stream side diagonally as shown in the figure below.

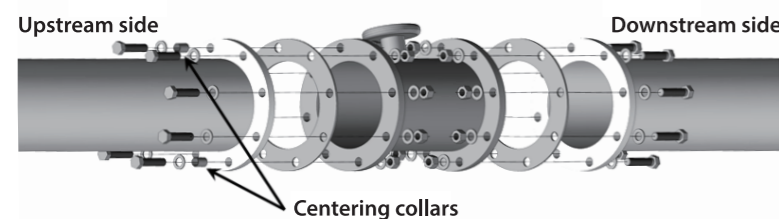

Connection between power supply and indicator

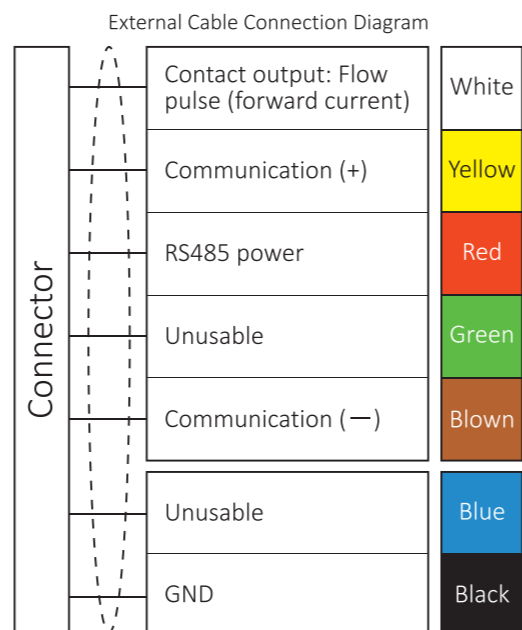

※1. The main body and GND are electrically common. Use an isolated power supply and indicator as required.

Piping condition

Conditions	Upstream	Downstream
90°elbow - Full-bore valve fully opened	Screw connection type (AS-W-25, 32): 20D or longer Flange connection type (AS-W-40, 50, 80, 100, 150, 200): 10D or longer	5D or longer
Joining	20D or longer	10D or longer
Enlarge pipe	20D or longer	5D or longer
Narrowing pipe	10D or longer	10D or longer

Please consult with us if the meter is to be installed near a pressure reducing valve or a flow control valve.

Other solutions we offer

Please contact us for requirements of measuring other type of gas and smaller flow-rate, or of meter installation where straight pipe section cannot be secured. The following product lineup is available.

model UX/UZ Ultrasonic Flow Meter for Fuel Gas Management

- No straight pipe section required, wide rangeability, and easy to replace batteries!
- City gas, Butane, Propane, Argon (only for DN40, 50), and Nitrogen can be measured.

Solutions for Houses

- Calculation of gas and water used in houses.

Solutions for Industry

- Compressed air measurement
- Cooling and coolant water monitoring
- Chemical injection monitoring
- Microstream flow control